



FASTPLATE

Automotive Equipment




Wheel
Balancers



**High-precision flange for optimal
wheel clamping**



**50% of a good balancing
depends on the
wheel clamping and centring
system.
Why risk it?**

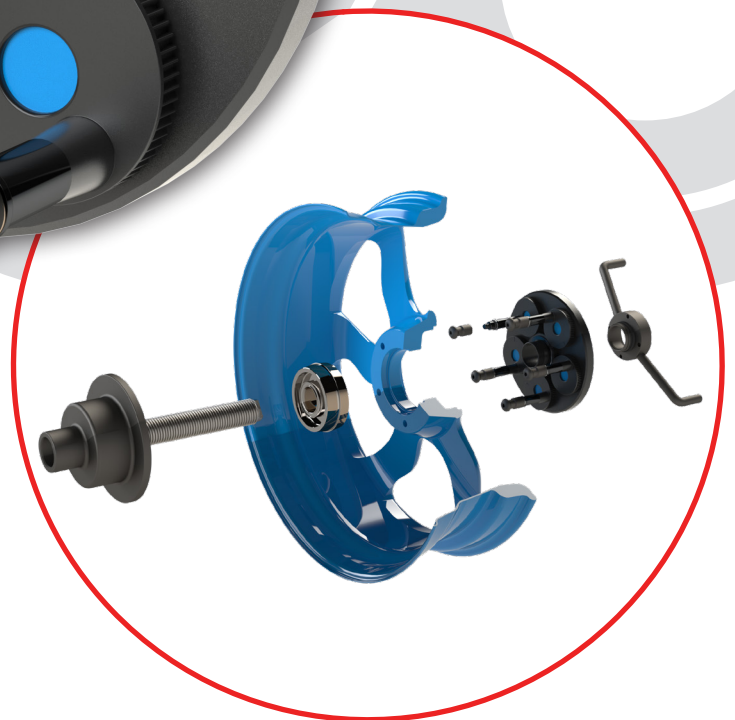











































MAIN FEATURES

- ✓ **Excellent** balancing results!
- ✓ **Uniform axle load** distribution, like wheel bolts on the vehicle
- ✓ **Quick and easy set-up**
- ✓ **Indestructible** and **lightweight (only 1.5 kg)**
- ✓ **Secure clamping and balancing.** No damage to alloy wheel surfaces or cracks in plastic-coated wheels
- ✓ **Pin heads** that correctly fit steel and alloy rims, **interchangeable** by means of a quick-release system
- ✓ **UNIVERSAL.** Applicable to any Teco Ø 40 mm wheel balancer.

Competent and fast service will inspire confidence, ensuring greater customer loyalty.

PRODUCT OVERVIEW

	<p>8-21100294 PPF FASTPLATE 5</p> <p>for 5-hole rims. Clamping range 95.25 - 180 mm</p> <table border="1"> <tbody> <tr><td></td><td>Ø 28</td></tr> <tr><td></td><td>Ø 22,5</td></tr> <tr><td></td><td>Ø 22,5</td></tr> <tr><td></td><td>Ø 19</td></tr> </tbody> </table>		Ø 28		Ø 22,5		Ø 22,5		Ø 19		<p>8-21100295 PPF FASTPLATE 3-4-6-8</p> <p>for 3- 4- 6- 8-hole rims. Clamping range 95.25 - 180 mm</p> <table border="1"> <tbody> <tr><td></td><td>Ø 28</td></tr> <tr><td></td><td>Ø 22,5</td></tr> <tr><td></td><td>Ø 22,5</td></tr> <tr><td></td><td>Ø 19</td></tr> </tbody> </table>		Ø 28		Ø 22,5		Ø 22,5		Ø 19
	Ø 28																		
	Ø 22,5																		
	Ø 22,5																		
	Ø 19																		
	Ø 28																		
	Ø 22,5																		
	Ø 22,5																		
	Ø 19																		
	<p>8-21100296 PPF FASTPLATE KIT</p> <p>for 3- 4- 5- 6- 8-hole rims. Clamping range 95.25 - 180 mm</p> <table border="1"> <tbody> <tr><td></td><td>Ø 28</td></tr> <tr><td></td><td>Ø 22,5</td></tr> <tr><td></td><td>Ø 22,5</td></tr> <tr><td></td><td>Ø 19</td></tr> </tbody> </table>		Ø 28		Ø 22,5		Ø 22,5		Ø 19		<p>8-21100297 PPF-C SLEEVE HANDLE</p> <p>Sleeve for automatic clamping wheel balancers. It screws directly onto the FASTPLATE to make work easier and faster</p>								
	Ø 28																		
	Ø 22,5																		
	Ø 22,5																		
	Ø 19																		

The manufacturer reserves the right to modify the features of its products at any time.

Cod. DPTC000469_10_2023