



Automotive Equipment

# 5500C - 4500C

## Electrohydraulic underwheel scissors type lift

 Lifts



5500 4500



## Electrohydraulic underwheel scissors type lift for total wheel alignment "CT"


# 5500C - 4500C

Electrohydraulic underwheel scissors type lift for total wheel alignment “CT” with: - rear oscillating platforms and recesses for front turntables.  
Auxiliary wheel release lift “LT”.

Versions available:

**TECO 5500C - TECO 5500 CT - TECO 5500 CT LT**

**TECO 4500C - TECO 4500 CT - TECO 4500 CT LT**

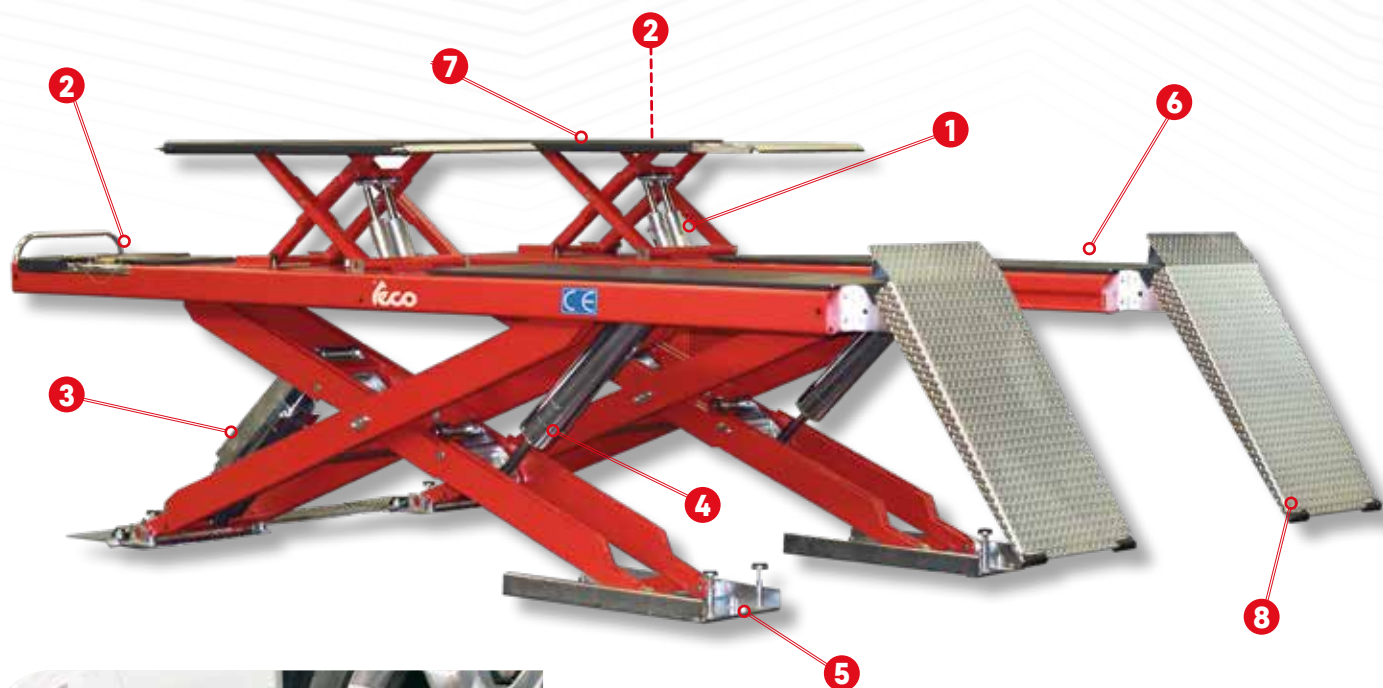

## 1 LIFT TABLE WITH DOUBLE CYLINDER

Lift table with **double lifting cylinder** to ensure a constant parallel lift movement.

## TURNTABLE 2

**Adjustable** recess for the **turntable**.



## 3 ADJUSTABLE MECHANICAL SAFETY DEVICE

**Adjustable mechanical safety device**, also for exact adjustment for wheel alignment.







#### 4 DOUBLE LIFTING LEVER

**Double lifting lever** to ensure a constant parallel lift movement.

#### 5 ADJUST THE BASE FRAME

The wheel alignment versions of the range already include the possibility of adjust the base frame.



#### 6 SLIDING PLATES

Sliding plates with air central locking.

#### 7 LIFT-TABLE WITH DOUBLE EXTENSIONS

Lift table with double lifting cylinder and **double extensions**, in front and rear, which is very flexible, no movement of vehicle on the lift needed.



#### 8 SHORT AND STURDY RAMPS

Easy drive on with short and **sturdy ramps** due to very low height.

#### CONTROL UNIT

Control unit with few **essential keys** and **clear** and **intuitive functional icons**.



#### SUPPLIED ACCESSORIES

- Automatic runway levelling system with master/slave hydraulic circuit.
- Self-lubricating bushings on all rotating parts.
- Set of 4 rubber pads.

#### OPTIONAL ACCESSORIES


- Pair of cross pieces and pads for off-road vehicles.
- Kit for flush installations..

See separate catalogue for further accessories.


# TECO 5500C - 4500C





## TECO 5500C - TECO 4500C

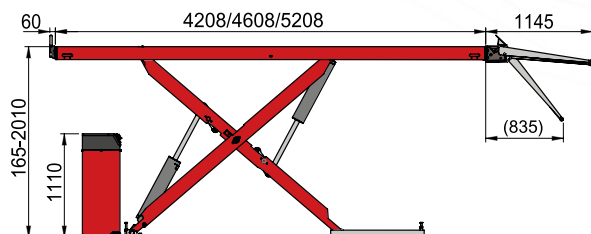



## OVERALL DIMENSIONS

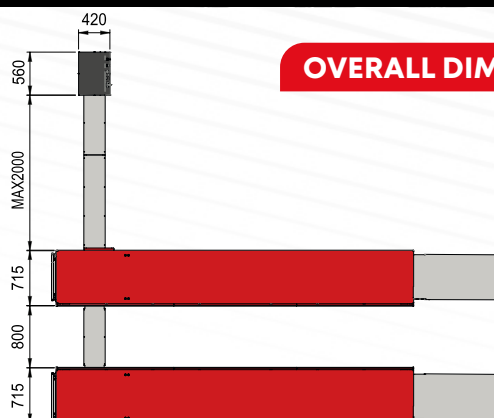

## TECO 5500C CT - TECO 4500C CT

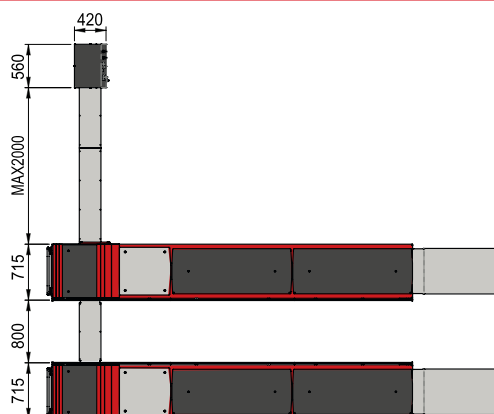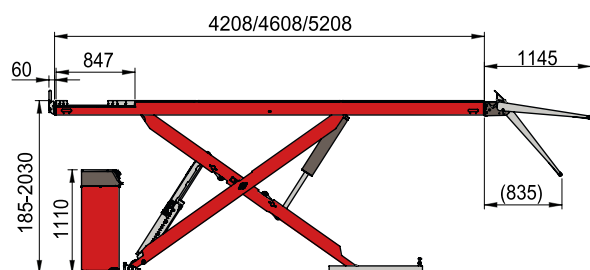

## TECO 5500C CT LT - TECO 4500C CT LT

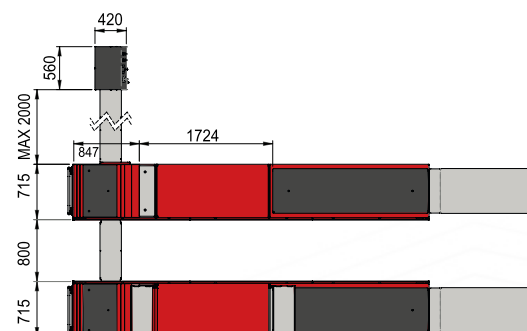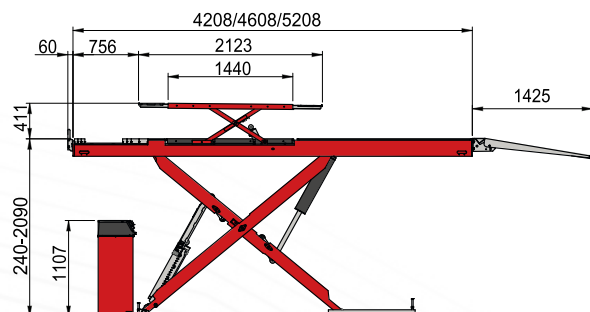

## TECHNICAL DATA

### TECO5500C - TECO5500C CT - TECO5500C CT LT

Main lift capacity	5500 kg
"LT" capacity	4000 kg
Lifting time	45 s
Motor	400/230V - 3kW - 3Ph - 50/60Hz
Main lift max.lifting height	2010/2030/2090 mm
"LT" max.lifting height	411 mm
Lift minimum height	165/185/240 mm
Runboard length	4608/5208 mm

### TECO4500C - TECO4500C CT - TECO4500C CT LT

Main lift capacity	4500 kg
"LT" capacity	4000 kg
Lifting time	45 s
Motor	400/230V - 3kW - 3Ph - 50/60Hz
Main lift max.lifting height	2010/2030/2090 mm
"LT" max.lifting height	411 mm
Lift minimum height	165/185/240 mm
Runboard length	4208 mm

The manufacturer reserves the right to modify the features of its products at any time.

Cod. DPTC000493\_06\_2024



NEXION SPA - ITALY -  
www.tecoautomotive.com - teco@teco.it

Designed in  
ITALY

