




ELECTRO-HYDRAULIC TWO POST LIFTS

TECO HC4002

**Versatile and universal
lifting experience!**



This lift has been designed, developed and manufactured
according to recommendations of EN1493:2022

Structural features

ASYMMETRIC INSTALLATION FOR BETTER DOOR-OPENING ANGLE.

- Stable, strong bend posts with internal reinforcement
- Designed in 2-parts to optimize transport and installation of the lift



- Low minimum height
- Lifting area with 3-stage arms: from short wheelbase to medium wheelbase, including vans
- Parallel parking of arms in the rear for an easier positioning of vehicles

Operating system

- Efficient hydraulic system with pushing cylinders
- Synchronization cables





Maximum installation flexibility

- Top crossbar with maximum height limit function, designed in two parts
- Top crossbar with adjustable mounting to reduce installation width from 3500 mm to 3250 mm, suitable for any workshop

Protections

Rubbers for door-protection

Encapsulated arm rotation locking system with 360-degree toothed engagement, ensuring stability and safety



- **CE safety stop** before final descent: no foot guard bar required
- **Electrical-operated mechanical safety lock**



Accessories

Secondary lowering speed kit for slower and more controlled descent:

J213-4100000

Height extension 700 mm:

J213-4200000

Base-plate for installation – to reduce effective concrete thickness:

NX1316014

Lifting pads for ultra-low vehicles: minimum height 78 mm:


NX1316006

See separate catalogue for further accessories.

Dotation

a. Double telescopic lifring pad with large adjustability range (up to 4 ton) - 95-174 mm

b. Extensions: 50 mm and 100 mm

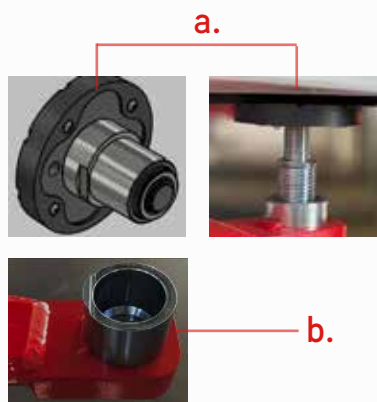

NEWS E-CAR ACCESSORIES



8-48100075



8-48100073





NX1316051



NX1316064

Dimensions

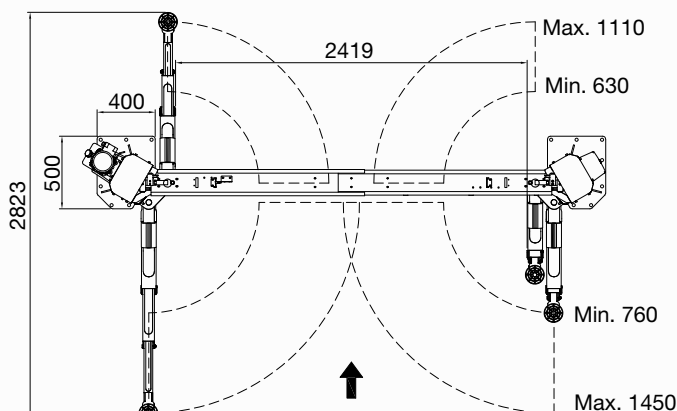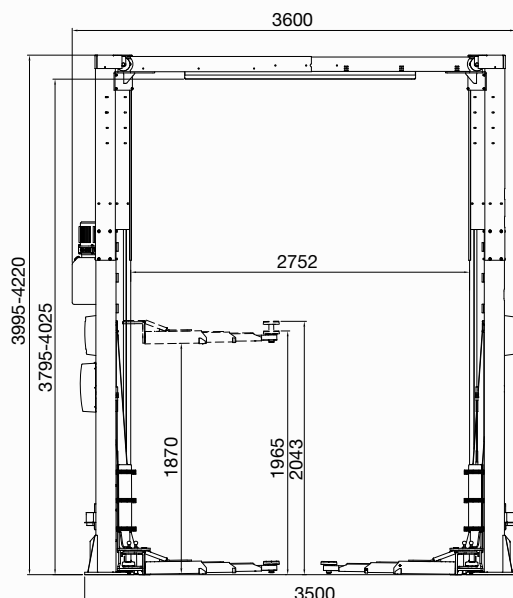

TECHNICAL DATA

Maximum capacity	4000 kg
Lift height	3995 - 4220 mm
Mounting width	3500 - 3250 mm
Minimum useful height	95 mm
Maximum useful height	2043 mm
3-phase motor	400/230V - 3kW - 3Ph - 50/60Hz
1-phase motor	230V - 3kW - 1Ph - 50/60Hz
Minimum installation depth	100 - 140 mm*

*refer to installation drawings and user manual



www.tecoautomotive.com

TECO is a brand of the NEXION SpA Group

Via Strada Statale 468, n. 9 - 42015 Correggio (RE)

Operational headquarters: Via Dinazzano, 4 - 42015 Prato (RE)

+39 0522 736780 | teco@teco.it

