



Automotive Equipment

RR04-RR06



Rim repair system



10" - 24"



10" - 26"



**Millimeter precision, safety on the road.
Your wheel is back to perfect**

Tyre Chargers | Wheel Balancers | Wheel Aligners | Lifts | Complementary Equipment

RR04-RR06

Professional equipment for repairing steel and aluminum alloy rims, suitable for any type of rim repair in service of the tire specialist.

Maximum performance and maximum reliability in a solid and compact machine.

MODEL RR04

- **Slim** and **compact** supporting structure.
- **Single push cylinder** for rim straightening.
- Rim rotation transmission system with **gear reducer**.
- Ideal for low work volumes and small repairs.

TECHNICAL DATA

Height	1710 mm
Depth	972 mm
Width	1198 mm
Working pressure	140 bar
Net weight	390 kg
Hydraulic control unit motor	0,55kW / 0,75hp
Working engine	0,75kW / 1hp
Rotating speed	5-98 rpm
Power supply	230V-1Ph-50/60Hz 400V-3Ph-50/60Hz



Moving Lathe



Gear Box





Rim diameter



Standard Bridge support kit

OVERALL DIMENSIONS RR04

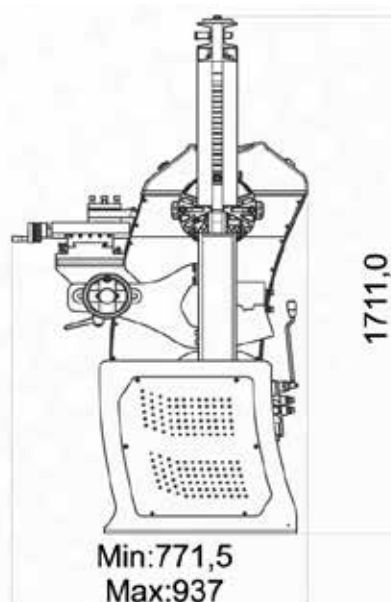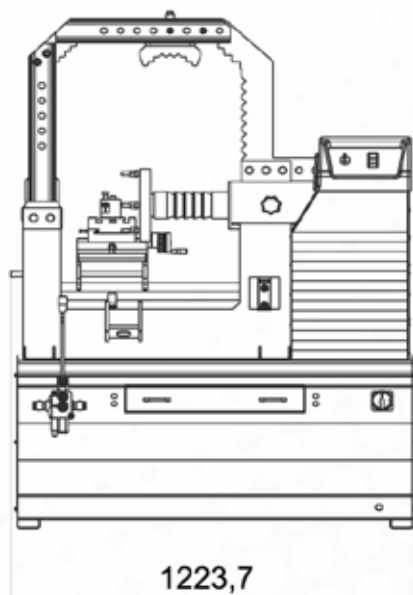



MODEL RR06

- **Solid** and **robust** supporting structure
- **Double push-and-pull cylinder** for maximum rim straightening precision
- Rim rotation transmission system with V-belt for maximum performance even during turning operations. Ideal for daily-weekly work volumes and any type of rim repair.

TECHNICAL DATA

Height	2153 mm
Depth	1032 mm
Width	1554 mm
Working pressure	140 bar
Net weight	455 kg
Hydraulic control unit motor	0,55kW / 0,75hp
Working engine	0,75kW / 1hp
Rotating speed	250 rpm
Power supply	230V-1Ph-50/60Hz 400V-3Ph-50/60Hz



Turning Lathe Support



Moving Lathe



V-Belt





Rim diameter



Standard Bridge support kit

OVERALL DIMENSIONS RR06

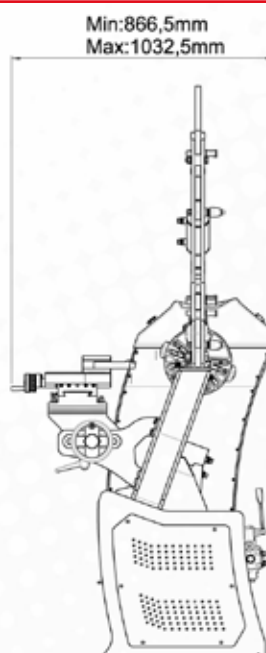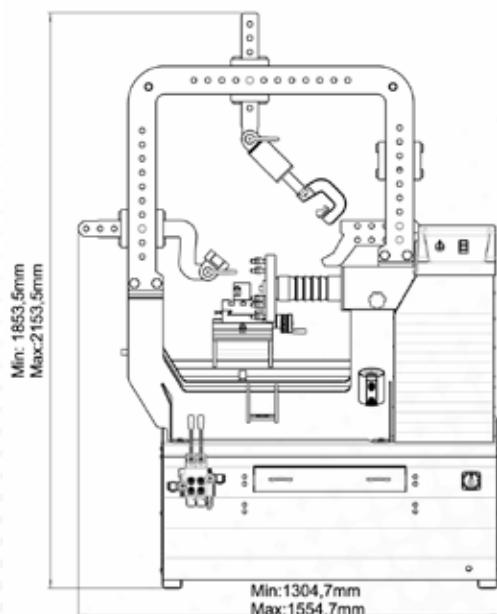

RR04-RR06



DOTATION

RR04



RR06



ACCESSORIES AVAILABLE FOR BOTH VERSIONS



8-51100061

Centering rings

Ø 56,1 ÷ 69,9 mm H10 mm



8-51100062

Centering rings

Ø 70,2 ÷ 76 mm H10 mm



8-51100078

Centering rings

Ø 73,1 ÷ 120,9 mm H10 mm



8-51100064

Electric infrared heater for rims
(400V)

8-51100065

Electric infrared heater for rims
(230V)

DATI TECNICI

Power supply **230V/400V**
50/60Hz

Power requirement **6 Kw**

Heating temperature **2,5 minutes= 100° C**
5 minutes= 200° C

Adjustable timer up to a maximum
of 4 minutes

High-temperature compatible
device power **cable**

Adjustable **height**



8-51100066

Polishing and cleaning kit
(for RR04)

8-51100067

Polishing and cleaning kit
for RR06)

For further information, consult the complete accessories catalogue.

The manufacturer reserves the right to modify the features of its products at any time.